

# RT Sealcoat




## Setting the Standard for Sealcoats

Proven to produce high-quality results, Crafco RT sealcoat is a reliable workhorse that has delivered for decades. RT is a refined tar sealcoat with excellent resistance against water, sun, salt and chemicals. It adheres easily, dries fast, and cleans up with just water. With a rich, black finish and outstanding durability, RT sealcoat offers both a beautiful appearance and reliable protection to stop deterioration before it starts.

### BENEFITS

- Pleasing black finish**
- Outstanding durability**
- Fast dry and cure time**
- Meets or exceeds relevant specs**

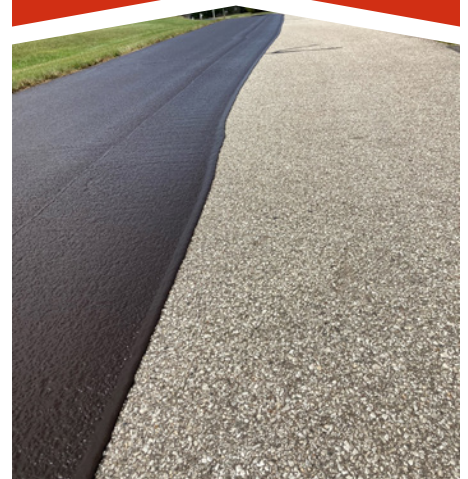



## Superior Protection for Pavement

### FEATURES

Rich black finish

Fast dry and cure time

Water cleanup

Available in concentrate, ready mix, sand mix, and sand ready mix

Low VOC (<50 g/L)

Meets or exceeds ASTM, AASHTO and FAA specifications



Scan this QR code to view all of Crafcó's material documentation.

### Crafcó RT sealcoat is available in four grades for different applications

**RT Choice** is the standard among pavement sealcoats, protecting against a range of environmental damage for 1-3 years. It's great for home driveways, bike paths and other light-traffic applications.

**RT Elite** adds a blend of polymers to the mix, increasing water repellency and UV resistance while maintaining its rich, black finish longer. Reapplication is suggested every 2-4 years, offering contractors, agencies and property owners a cost-effective solution to protect a variety of paved surfaces.

**RT Ultimate** doubles our proprietary polymer blend, extending protection up to 6 years and adding extra resistance against damaging chemicals from leaking vehicles. Ultimate is the most durable option for the most demanding environments.

**RT Stealth** is formulated to meet FAA Specification P631 for use at airports. Stealth eliminates the need for on-site additive mixing and minimizes water dilution for easy application and optimal film thickness. Given the rigorous demands of airports, we recommend reapplying Stealth every 2-3 years for runway sections and every 3-4 years for non-runway sections.

©July 2025 Crafcó, Inc.