
## **Mastic One®**

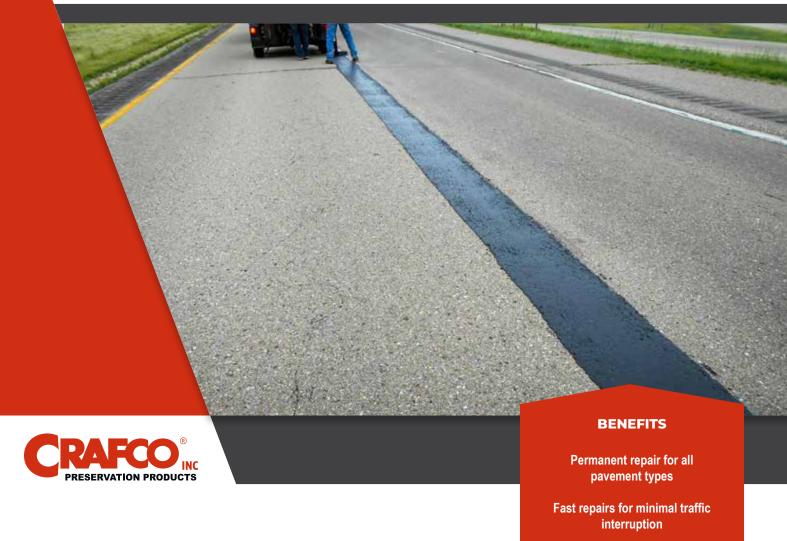


## The ideal solution for durable repairs to wide cracks and other distresses.

Mastic One® is a hot-applied mix of polymer-modified asphalt binder and select aggregate, used for fixing a variety of wide cracks and distresses in pavement. Mastic One provides a durable, load-bearing, waterproof repair that stays flexible so it won't break apart the surrounding pavement. Available in different mix designs to match your climate and traffic conditions, Mastic One requires no field mixing or additives but will accept bulking stone for deep repairs. Best of all, Mastic One is ready for traffic as soon as it cools, minimizing lane closures.

**Durable and load-bearing** 

Stays flexible to move with thermal expansion/contraction





## **RECOMMENDED USES**

Repairing Longitudinal Joint Failures

Leveling Depressed Thermal Cracks

Filling Wide Cracks and Joints

Pretreatment Prior to Surface Treatment

Filling Potholes

Sealing Utility Cuts

Skin Patch Repairs

Leveling Manhole Covers

Leveling Bridge Deck Approaches

Filling Spalls, Popouts, & Corner Breaks



## **FEATURES AND BENEFITS**

- Two formulations to meet ASTM D8260 Type I or Type II (cold climates), the industry standard for hot-applied, aggregate-filled, polymer-modified mastic used to repair distresses in asphalt and Portland Cement Concrete pavements
- Highly adhesive and flexible to remain sealed in place
- Durable adhesion and strength with polymers and special aggregate to withstand traffic and weather for 5+ years
- Eliminates infiltration of water and debris to prevent further deterioration
- No field blending; Engineered in pre-measured package for better consistency and performance, with reduced labor and error
- Easy, fast installation, with no compaction needed
- Reduces labor, equipment and traffic disruption

Pair Mastic One with the Crafco Patcher II, Patcher 4 or EZ Patcher for quick melting, easy application, and a reliable repair that lasts.

©April 2024 Crafco, Inc.



